




PRODUCT SELECTION MANUAL

www.safeinvert.com



PROFESSIONAL SOFT STARTER INVERTER SUPPLIER

○ Soft Starter ○ Frequency Inverter ○ Industrial Control Accessory Products

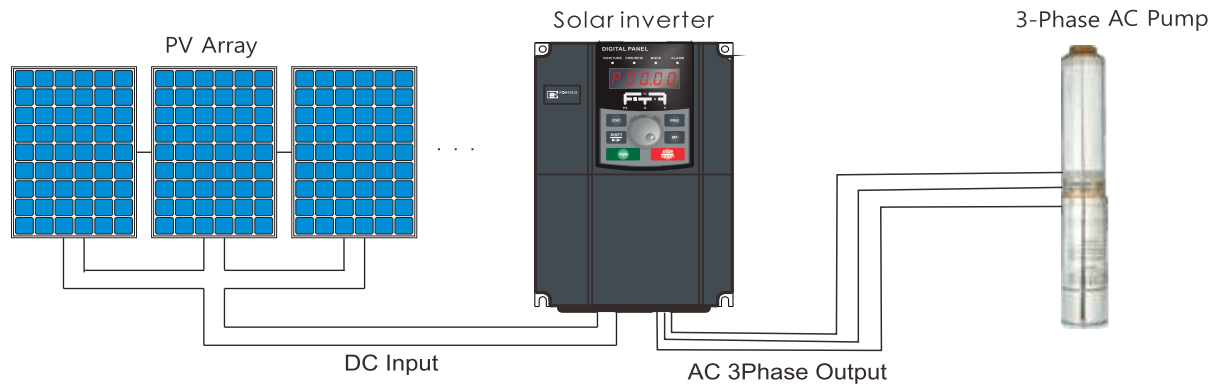

Using multiple power supply design, power input can use solar energy photovoltaic DC power supply, can also be a single-phase, three-phase AC power supply, simple wiring.

SPECIFICATIONS AND OPTIONS

Model	Input/Output voltage	Rated output frequency (KW)	Rated input current (A)	Rated output current (A)	Match motor (KW)
PT330-0R7D-1B	Input: { DC:200~350V AC:1PH,220V	0.75	8.2	4	0.75
PT330-1R5D-1B		1.5	14	7	1.5
PT330-2R2D-1B		2.2	23	9.6	2.2
PT330-004D-1B		3.7	34	17	3.7
PT330-0R7D-2B	Input: { DC:200~350V AC:3PH,220V	0.75	5	3.8	0.75
PT330-1R5D-2B		1.5	5.8	5.1	1.5
PT330-2R2D-2B		2.2	10.5	9.0	2.2
PT330-004D-2B		3.7	14.6	13	3.7
PT330-5R5D-2B		5.5	26	25	5.5
PT330-7R5D-2B		7.5	35	32	7.5
PT330-011D-2		11	46.5	45	11
PT330-015D-2		15	62	60	15
PT330-018D-2		18.5	76	75	18.5
PT330-0R7D-3B	Input: { DC:400~750V AC:3PH,380V	0.75	3.4	2.1	0.75
PT330-1R5D-3B		1.5	5	3.8	1.5
PT330-2R2D-3B		2.2	5.8	5.1	2.2
PT330-003D-3B		3	7.5	7	3
PT330-004D-3B		3.7	10.5	9	3.7
PT330-5R5D-3B		5.5	14.6	13	5.5
PT330-7R5D-3B		7.5	20.5	17	7.5
PT330-011D-3B		11	26	25	11
PT330-015D-3B		15	35	32	15
PT330-018D-3		18.5	38.5	37	18.5
PT330-022D-3		22	46.5	45	22
PT330-030D-3		30	62	60	30
PT330-037D-3		37	76	75	37
PT330-0R7D-4B	Input: { DC:400~750V AC:3PH,480V	0.75	3.4	2.1	0.75
PT330-1R5D-4B		1.5	5.0	3.8	1.5
PT330-2R2D-4B		2.2	5.8	5.1	2.2
PT330-004D-4B		3.7	10.5	9	3.7
PT330-5R5D-4B		5.5	14.6	13	5.5
PT330-7R5D-4B		7.5	20.5	17	7.5
PT330-011D-4B		11	26	25	11
PT330-015D-4B		15	35	32	15
PT330-018D-4		18.5	38.5	37	18.5
PT330-022D-4		22	46.5	45	22
PT330-030D-4		30	62	60	30
PT330-037D-4		37	76	75	37